


CVHD-950 VCXO


Ultra-Low Phase Noise Oscillators

CVHD-950 Model
9×14 mm SMD, 3.3V, CMOS


50 MHz HCMOS 3.3V

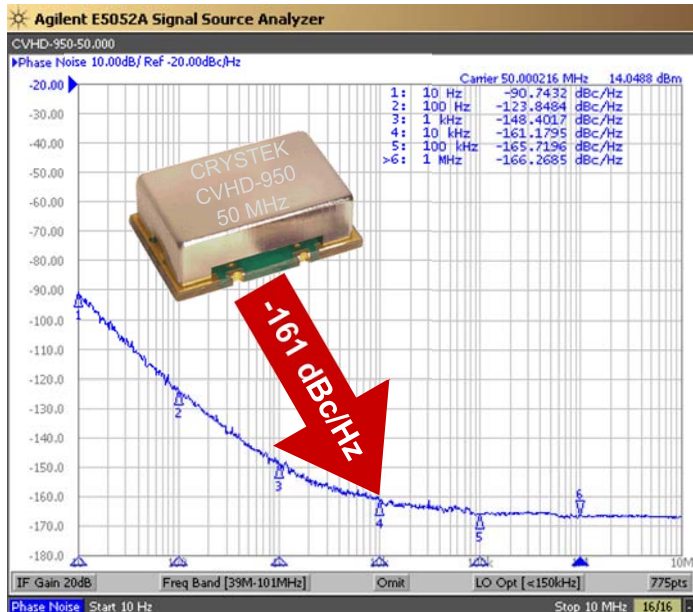


100 MHz HCMOS 3.3V

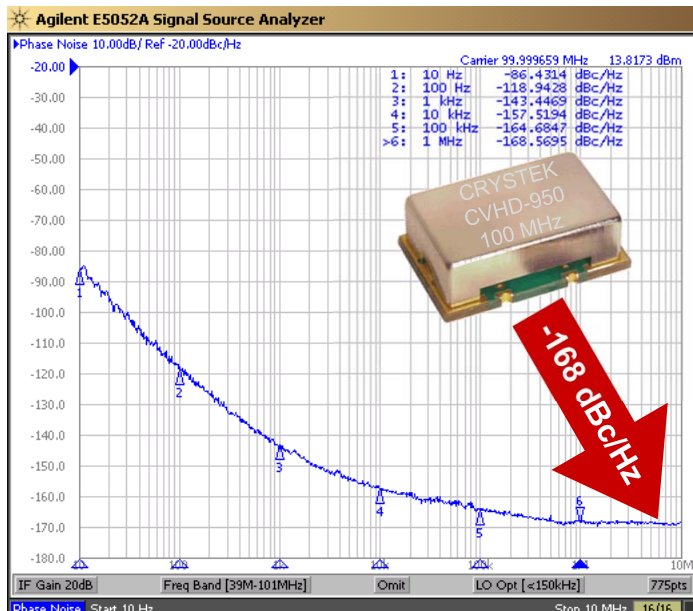

80 MHz HCMOS 3.3V

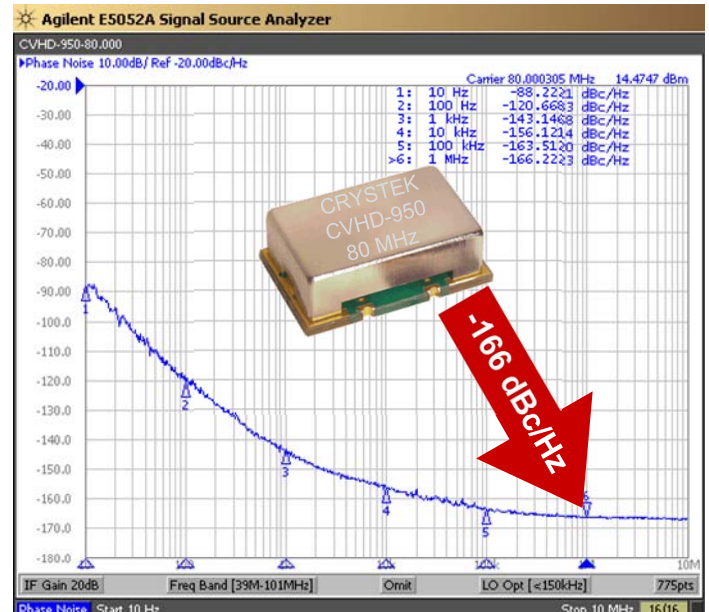

122.880 MHz HCMOS 3.3V

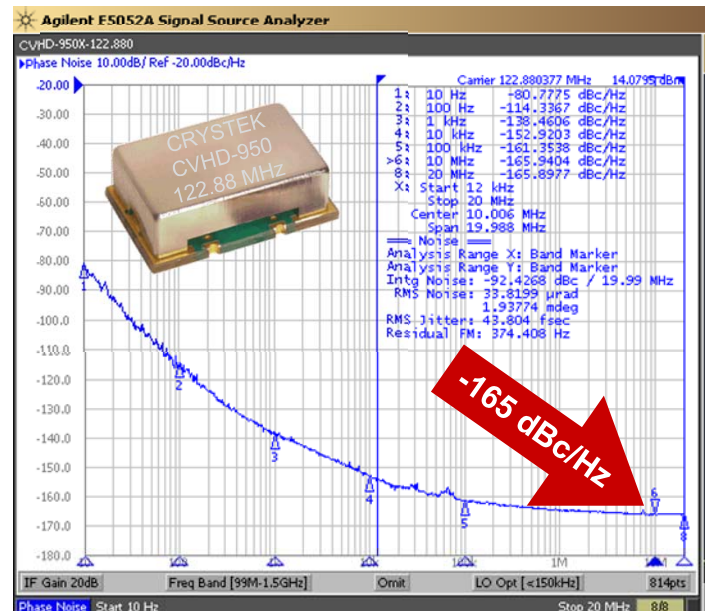

Model CVHD-950 is a 40 MHz to 130 MHz CMOS Voltage Controlled Crystal Oscillator. High Q crystal and 3rd overtone technology provides Ultra-Low Phase Noise and Low-Jitter performance with a CMOS output. Features include -168 dBc/Hz phase noise floor with 3.3Vdc input voltage, -40°C to +85°C operating temperature, and 9×14 mm SMT package. The oscillator has no sub-harmonics.

Applications include High Definition TV, Avionics Low Phase Signal Sources, and Test and Measurement.

Rev: Z
Date: 26-Aug-2019
Page 1 of 3

CVHD-950 VCXO

Ultra-Low Phase Noise Oscillators



CVHD-950 Model
9x14 mm SMD, 3.3V, CMOS

| | |
|--------------------------------------|-------------------------------------------------------------------------------|
| Frequency Range: | 40 MHz to 130 MHz |
| Temperature Range: | 0°C to +70°C (standard) |
| (Option M) | -20°C to +70°C |
| (Option X) | -40°C to +85°C |
| Storage: | -45°C to 90°C |
| Input Voltage: | 3.3V ±0.3V |
| Supply Pushing: | 1.2ppm/V Typical |
| Input Current: | 15mA Typical, 25mA Max |
| Output: | CMOS |
| Symmetry: | 45/55% Max @ 50%Vdd |
| Rise/Fall Time: | 3nsec Max @ 20% to 80% Vdd |
| Logic: | "0" = 10% Vdd Max "1" = 90% Vdd Min |
| Load: | 15pF |
| Output Current: | ±24mA Max |
| Input: | |
| Modulation Bandwidth: | >10kHz @ -3dB |
| Input Impedance: | 51 kΩ |
| Control Voltage: | 1.65V ±1.65V |
| Tuning Sensitivity: | +25ppm/V Typical |
| Frequency Pulling: | ±20ppm APR Min (Inclusive of frequency stability, calibration, and aging.) |
| Linearity: | ±5% Max |
| Phase Jitter (12kHz~20MHz): | 40 fsec Typical @100MHz |
| Typical Phase Noise (100MHz): | |
| 1kHz | -140 dBc/Hz |
| 10kHz | -155 dBc/Hz |
| 100kHz | -164 dBc/Hz |
| 1MHz | -166 dBc/Hz |
| Phase Noise Floor: | -166 dBc/Hz Typical, -162 dBc/Hz Max |
| Sub-harmonics: | None |
| Aging: | <3ppm 1 st year, <1ppm thereafter |
| Weight: | 1.2 g |

Part Number Example: CVHD-950X-100.000 = 3.3V, 45/55, -40°C to +85°C (±20ppmAPR), 100 MHz



| Absolute Maximum Ratings | | |
|--------------------------|--------|------|
| Parameter | Rating | Unit |
| Input Supply Voltage | +6.0 | V |
| Input Control Voltage | +10.0 | V |

Rev: Z
Date: 26-Aug-2019
Page 2 of 3

CVHD-950 VCXO

Ultra-Low Phase Noise Oscillators



CVHD-950 Model
9×14 mm SMD, 3.3V, CMOS

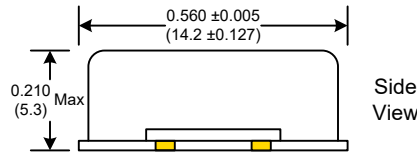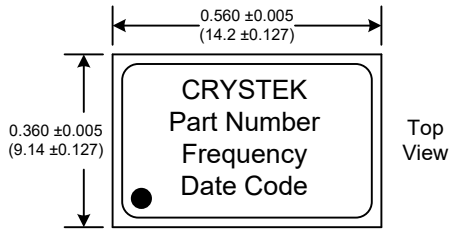

RECOMMENDED REFLOW SOLDERING PROFILE
900034 (See App Note listed on website)

<http://www.crystek.com/specification/reflow/900034.pdf>


SUGGESTED PAD LAYOUT

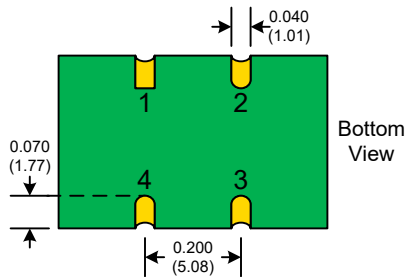

| Pad | Connection |
|-----|--------------|
| 1 | Volt Control |
| 2 | GND |
| 3 | OUT |
| 4 | Vdd |

PAD FINISH: Immersion Gold (ENIG); 5 micro inches maximum

TAPE AND REEL

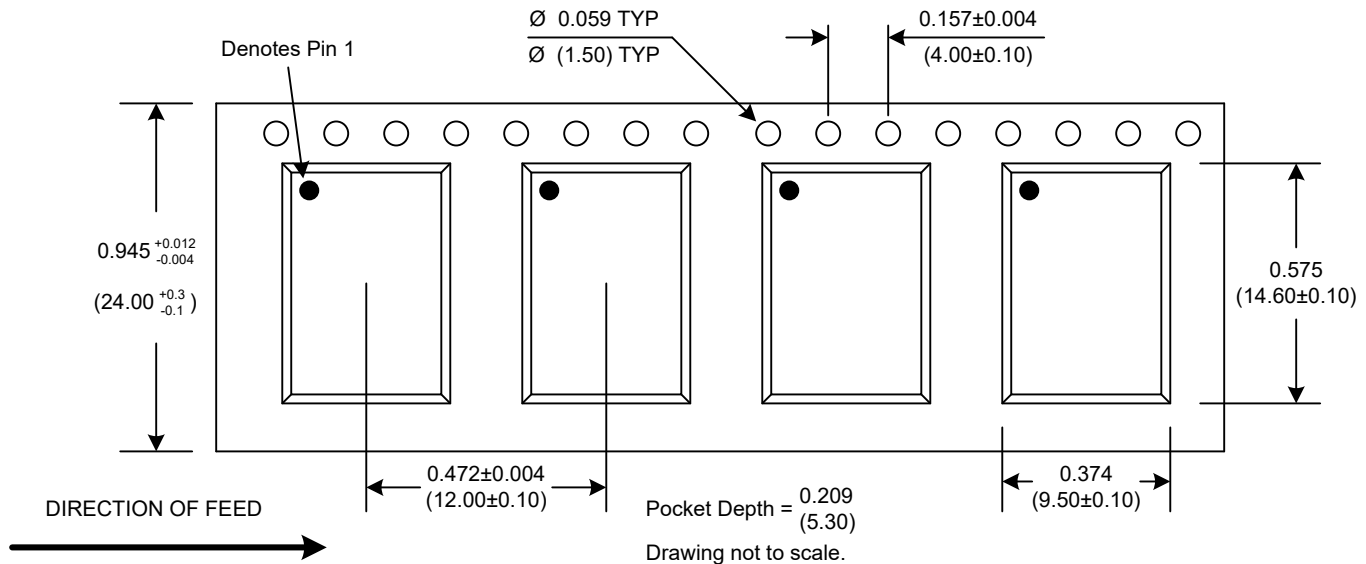

Mechanical:

Shock: MIL-STD-883, Method 2002, Condition B
Solderability: MIL-STD-883, Method 2003
Vibration: MIL-STD-883, Method 2007, Condition A
Solvent Resistance: MIL-STD-202, Method 215
Resistance to Soldering Heat: MIL-STD-202, Method 210, Condition I or J

Environmental:

Thermal Shock: MIL-STD-883, Method 1011, Condition A
Moisture Resistance: MIL-STD-883, Method 1004

Rev: Z

Date: 26-Aug-2019

Page 3 of 3

Crystek Corporation reserves the right to make changes to its products and/or information contained herein without notice. No liability is assumed as a result of its use or application.