

# C4520X7R3D471K130KA

TDK Item Description : C4520X7R3D471KT\*\*\*\*



## Application & Main Feature

Commercial Grade ( High Voltage (1000V and over) )

## Series

C4520 [EIA CC1808]



## Dimensions

L 4.50mm +/-0.4mm  
 W 2.00mm +/-0.2mm  
 T 1.30mm +/-0.2mm  
 B 0.20mm Min.  
 G

## Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

## Rated Voltage

3D (2000Vdc)

## Capacitance

470pF

## Capacitance Tolerance

K (+/-10%)

## Dissipation Factor

3% Max.


## Insulation Resistance

10Gohm Min.


## AEC-Q200

Not Applicable


## DC Bias Characteristic

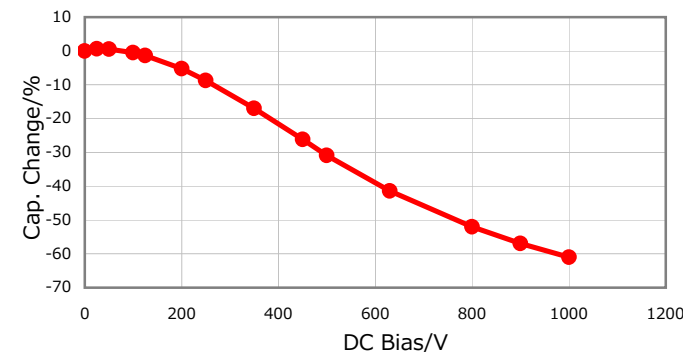


## |Z|, ESR vs. Freq. Characteristics

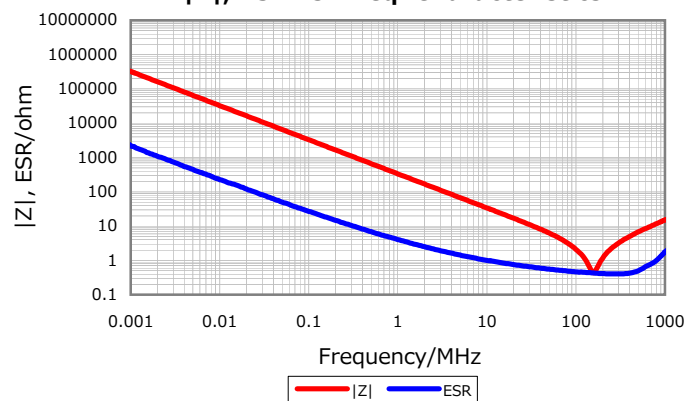


## Temperature Characteristics

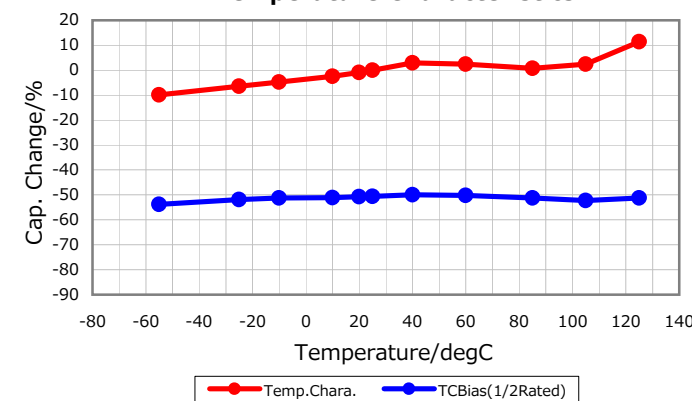

## Cap. vs. Freq. Characteristic

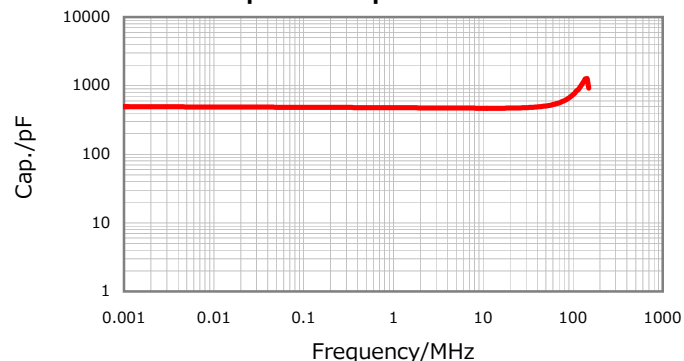

## Ripple Temperature Rise Characteristics

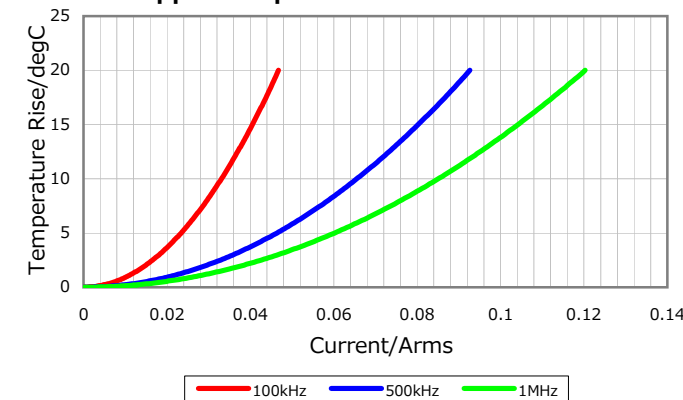

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



⚠ All specifications are subject to change without notice.

January 4, 2016